


Name **Arbor-Fenex/Side swing-Side hung**  
 Transmittance (Uw) **1.2816 W/m<sup>2</sup>K**



Computations performed in accordance with EN ISO 10077-1:2007

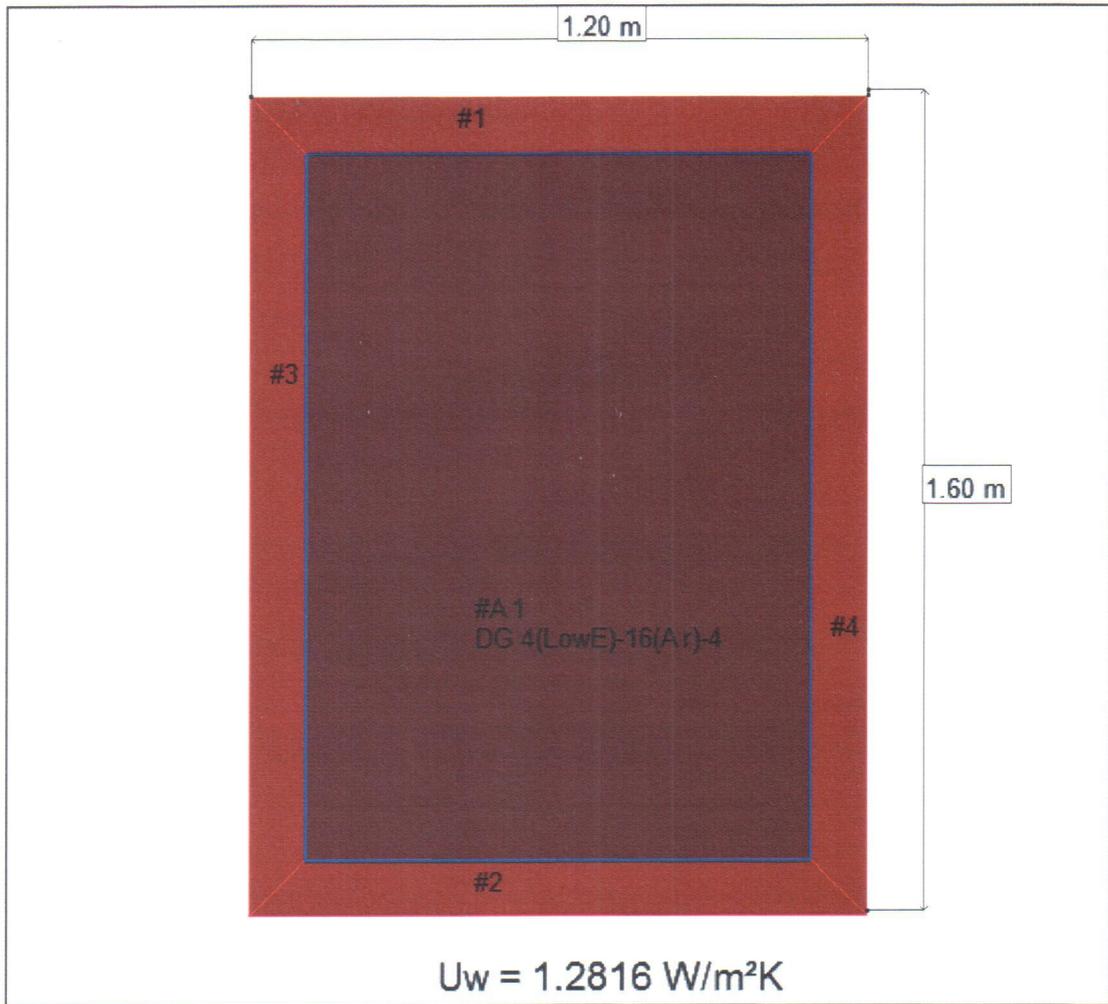

**Arbor-Fenex/Side swing-Side hung**

Width 1200.00 mm  
 Height 1600.00 mm  
 Transmittance (Uw) **1.2816 W/m<sup>2</sup>K**

#	Node	U [W/m <sup>2</sup> K]	B [mm]	ψ [W/mK]
1	Top node	1.3906	109.69	0.0336
2	Bottom node	1.7413	109.69	0.0356
3	Left node	1.3424	107.72	0.0327
4	Right node	1.3424	107.72	0.0327

Name	U [W/m <sup>2</sup> K]	Width [mm]	Height [mm]	A [m <sup>2</sup> ]	Col.
#1	1.3906	1200.00	109.69	0.11981	
#2	1.7413	1200.00	109.69	0.11981	
#3	1.3424	107.72	1600.00	0.16053	
#4	1.3424	107.72	1600.00	0.16053	
#A1 DG 4(LowE)-16(Ar)-4	1.1006	984.57	1380.62	1.35932	

